



SHANTUI
VALUE THAT WORKS

LCCM

EQUIP MAX

KAYMA LEVANTE

Empresa fundada en 2018, con ubicación en Alicante.

Equipos con emisiones 0 .

Venta y alquiler de maquinaria para:

- Construcción
- Canteras
- Carreteras
- Excavaciones
- Pequeñas obras
- Desguaces
- Plantas de reciclajes
- Ejercito
- Extinción de incendios

Con las siguientes marca para España directamente de fabrica como IMPORTADOR DISTRIBUIDOR EN EXCLUSIVA .

www.kaymalevante.es



- RULOS



www.kaymalevante.es
Info@kaymalevante.es



SHANTUI
VALUE THAT WORKS



Kaymalevante.es



www.kaymalevante.es
Info@kaymalevante.es



SHANTUI



www.shantui.com



RODILLO 900/1.800KG

LIGHT TANDEM ROLLER

SRD900 SRD900H

double hydraulic drive
hydraulic steering
SRD900 mechanical vibrating
SRD900H Hydraulic vibrating



World leading hydrostatic driving system guarantees stepless speed control to achieve outstanding compaction result.



Lifting point is located at the center position, simplifying the loading and off loading.



Robust plastic water tank are fitted to prevent rust in sprinkling system.



SRD900H is equipped with Danfoss hydraulic vibrating motor.



Danfoss double drive hydraulic motor.




All function integrated in joystick for easy operation.

Technical Specifications:

SHANTUI

Type	SRD900	SRD900H
Weight		820kg
Working weight		820kg
Driving characteristic		
Speed		0-4km/h
Turning radius		200mm
Gradeability		30%
Drive	Double hydraulic drive	
Engine	Diesel engine	Gasoline engine
Model	19F	B65 2072
Type	Diesel engine, air-cooled	Gasoline engine, air-cooled
Power	4000w, vertical type, single cylinder	4000w, OHV, single cylinder
Compression	8.5kg/3000rpm	13.0kg/3000rpm
Vibration	Mechanical drive	Hydraulic drive
Static load		51770N
Nominal amplitude		0.5mm
Vibration frequency		70Hz
Exciting force		20kN
Tank capacities	Diesel engine	Gasoline engine
Fuel	15L	15L
Water		67L

SRD900 / SRD900H

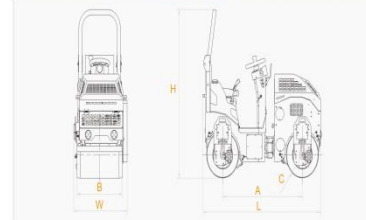

Dimension	SRD900 / SRD900H	
wheelbase	A	1200mm
Width of steel wheel (front and back)	B	700mm
Diameter of steel wheel (front and back)	C	500mm
Total length	L	1810mm
Total width	W	630mm
Total height	H	1900mm
Packing size	2120x970x1030mm	

LIGHT TANDEM ROLLER

SRD017 SRK017



World leading hydrostatic driving system guarantees stepless speed control to achieve outstanding compaction result.



Danfoss hydraulic vibrating motor.



Robust plastic water tank are fitted to prevent rust in sprinkling system.



All function integrated in joystick for easy operation.



Danfoss double drive hydraulic motor.




Pressure sprinker with high quality pump, internal spray system. Wind-protected nozzles are easily accessible.

Technical Specifications:

SHANTUI

Type	SRD017	SRK017
Weight		1700kg
Working weight		1700kg
Driving characteristic		
Speed		0-8km/h
Turning radius		100mm
Gradeability		30%
Drive	Double hydraulic drive	
Engine	Diesel engine	Gasoline engine
Model	Yanmar 37N76	HONDA, GX160
Type	Diesel engine, water-cooled	Gasoline engine, air-cooled, 4stroke
Power	27hp/3000rpm	27hp/3000rpm
Compression	SRD017	SRK017
Vibration		Hydraulic drive
Static load	80500N	79100N (front)
Nominal amplitude		0.5mm
Vibration frequency		85Hz
Exciting force		25kN
Tank capacities	Diesel engine	Gasoline engine
Fuel	30L	
Water	165L	

SRD017 / SRK017

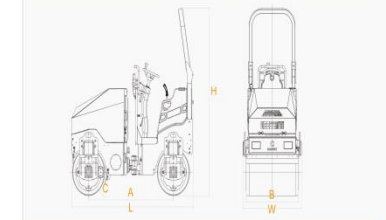

Dimension	SRD017		SRK017	
wheelbase	A	1420mm	1035mm	
Width of steel wheel	B	800mm	600mm	
Diameter of steel wheel	C	500mm	500mm	
Total length	L	2065mm	2000mm	
Total width	W	980mm	860mm	
Total height	H	2220mm	2200mm	
Tyre size	J	20.5R-15	R15	
Packing size	2300x1400x1700mm		2300x1400x1700mm	

RODILLO SIMPLE 10/12 T.



RODILLO 14 T



RODILLO 22 T



RODILLO 26T



RODILLO 36 T



RODILLO CON DOBLE TAMBOR 13T



COMPACTADOR ESPECIAL BASURAS



Cargadora de oruga 30 Tonoledas

